

FORM PTO-1390
(Rev 5-93)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

COLGRA P23AUS

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

U.S. APPLICATION NO. 097807057

INTERNATIONAL APPLICATION NO.

PCT/GB99/03333

INTERNATIONAL FILING DATE

October 8, 1999

PRIORITY DATE CLAIMED

October 8, 1998

TITLE OF INVENTION

METHOD OF COATING AND METHOD OF BONDING

APPLICANT(S) FOR DO/EO/US

Roger John LEACH

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.
 2. ☐ This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.
 3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
 4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
 5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau. (PCT/IB/308 mailed April 13, 2000)
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
 6. ☒ A copy of the International Application is attached.
 7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
 8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
 9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
 10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).
- Items 11. to 16. below concern other document(s) or information included:
11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98 with PTO FORM 1449.
 12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
 13. ☒ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
 14. ☐ A substitute specification.
 15. ☐ A change of power of attorney and/or address letter.
 16. ☒ Other items or information:

<input checked="" type="checkbox"/> Preliminary Examination Report <input checked="" type="checkbox"/> Annexes to Pre. Ex. Rep. <input checked="" type="checkbox"/> International Search Report <input type="checkbox"/> British Novelty Search Report <input checked="" type="checkbox"/> 3 copies of citations <input checked="" type="checkbox"/> Form PCT/IB/308 <input checked="" type="checkbox"/> International Publ. No. WO 00/20347 (Face page only)	<input checked="" type="checkbox"/> Copy of Request <input checked="" type="checkbox"/> 2 sheets of formal drawings <input checked="" type="checkbox"/> Abstract <input checked="" type="checkbox"/> Applicant Claims Small Entity Status <input checked="" type="checkbox"/> Marked-Up Version of Specification <input checked="" type="checkbox"/> Clean Version of Amended Specification
---	--

CERTIFICATION UNDER 37 CFR 1.10

I hereby certify that this Transmittal Letter and the papers indicated as being transmitted therewith is being deposited with the United States Postal Service on this date April 6, 2001 in an envelope as "Express Mail Post Office to Addressee" Mailing Label Number EL835030530US addressed to the: Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Michael J. Bujold
(typed or printed name of person mailing paper)

Michael J. Bujold
(signature of person mailing paper)

17. ■ The following fees are submitted:

Basic National Fee (37 CFR 1.492(a)(1)-(5)):

JC02

Rec'd PCT/PTO

0 6 APR 2001

Search Report has been prepared by the EPO or JPO \$860.00

International preliminary examination fee paid to USPTO (37 CFR 1.482) \$690.00

No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)). \$710.00

Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$1000.00

International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

CALCULATIONS

PTO USE ONLY

860

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(e)).

0

Claims	Number Filed	Number Extra	Rate
Total Claims	9-20 =	0	x \$18.00
Independent Claims	2-3 =	0	x \$80.00
Multiple dependent claim(s) (if applicable)			+ \$270.00

0

TOTAL OF ABOVE CALCULATIONS =

860

Reduction by 1/2 for filing by small entity, if applicable. **Applicant Claims Small Entity Status.** (Note 37 CFR 1.9, 1.27, 1.28).

430

SUBTOTAL =

430

Processing fee of \$130.00 for furnishing the English translation later the ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(f)).

+

0

TOTAL NATIONAL FEE =

430

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +

40

TOTAL FEES ENCLOSED =

470

Amount to be:
refunded

\$

charged

\$

a. ■ A check in the amount of \$ 470 to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. 04-0213 in the amount of \$ to cover the above fees.
A duplicate copy of this sheet is enclosed.

c. ■ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 04-0213. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Michael J. Bujold
Michael J. Bujold -- Registration No. 32,018
Davis & Bujold, P.L.L.C.
Fourth Floor
500 North Commercial Street
Manchester, NH 03101-1151
Telephone (603) 624-9220
Telefax (603) 624-9229

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of : Roger John LEACH
Serial no. :
Filed : with an effective filing date of October 8, 1999
For : METHOD OF COATING AND METHOD OF
BONDING
Group Art Unit :
Examiner :
Docket : COLGRA P23AUS

The Commissioner of Patents and Trademarks
Washington, D.C. 20231

PRELIMINARY AMENDMENT

Dear Sir:

By way of preliminary amendment, please amend the above identified application as set forth below.

In the Specification:

Please cancel pages 1 and 3 of the specification, in their entirety, in favor of a clean form of pages 1 and 3 of the specification, without any markings thereon, accompanying this response. Also accompanying this response is a copy of the original pages of the specification which show the addition(s) (in red ink) and the deletion(s) (by strikeout) to the canceled specification pages. The amended specification pages do not include any new subject matter and only include the changes which are indicated on the marked-up copy of the specification pages. Please enter the replacement specification pages into the record of this case.

In the Claims:

Please cancel original claims 1 - 9, as well as any Chapter II amended claims, in favor of new claims 10 - 18.

10. (NEW) A method of coating wherein different thermosetting materials are laid down in powder form one upon the other on a substrate, and heat is applied to melt and fuse the powders into respective coatings bonded together on the substrate.

11. (NEW) The method according to claim 10, wherein the powders have different rates of cure from one another.

12. (NEW) The method according to claim 11, wherein the higher cure-rate powder is laid down as a first layer on the substrate, and the lower cure-rate powder is laid down as a second layer on the first layer.

13. (NEW) The method according to claim 11, wherein while the second layer is still in the melt phase and the first layer is substantially cured, an item to be bonded to the substrate is brought into contact with the second layer and held there until the second layer cures.

14. (NEW) The method according to claim 10, wherein at least one of the powders includes pigmentation.

15. (NEW) The method according to claim 10, wherein one of the powders when fused is transparent.

16. (NEW) A method of bonding two surfaces together wherein the bond is effected using two bonding materials that have different cure-rates, the material of lower cure-rate being applied to the material of higher cure-rate while this latter material is in the uncured state, prior to curing of both.

17. (NEW) The method according to claim 16, wherein the materials are thermosetting materials and are deposited in powder form on respective substrates that are to be bonded together, heat is applied to both powders to melt them and to cure partly the material of higher cure-rate bonding it to its substrate, and this partly-cured material is then brought into contact with the melted material of low cure-rate so that upon curing of both materials a bond is established between them.

18. (NEW) The method according to claim 17, wherein at least one of the powders includes pigmentation.

REMARKS

Accompanying this response, please find replacement pages and marked-up pages of the specification which overcome some informalities noted in the specification on file. The undersigned avers that the enclosed replacement page(s) of the specification do not contain any new matter.

In the event that there are any fee deficiencies or additional fees are payable, please charge the same or credit any overpayment to our Deposit Account (Account No. 04-0213).

Respectfully submitted,



Michael J. Bujold, Reg. No. 32,018

Customer No. 020210

Davis & Bujold, P.L.L.C.

Fourth Floor

500 North Commercial Street

Manchester NH 03101-1151

Telephone 603-624-9220

Facsimile 603-624-9229

E-mail: patent@davisandbujold.com

METHOD OF COATING AND METHOD OF BONDING

FIELD OF THE INVENTION

This invention relates to coatings.

BACKGROUND OF THE INVENTION

5 It is known from GB-A-2207089 that powder coatings may be used for bonding two surfaces together by exploiting the melt phase to wet out the surfaces prior to effecting full cure to establish the bond. In normal
10 circumstances, especially when the bond is required between sheets or other large-area surfaces, it is found necessary to employ nip rolling or other pressure-applying means (mechanical or vacuum) to enable a good laminate to be produced. Application of pressure, however, tends to press out the melted powder, and this
15 can be of significant disadvantage where the powder is to provide a coloured or opaque coating to a glass or other transparent or translucent substrate. The applied pressure may result in thinning or pressing out of the melt such that on curing there is no solidity and
20 uniformity of coating-colour or -opacity and the backing to the coating shows through. It is one of the objects of the present invention to provide a method of bonding by which such problems can be avoided.

SUMMARY OF THE INVENTION

25 According to one aspect of the present invention there is provided a method of coating wherein different thermosetting materials are laid down in powder form one upon the other on a substrate, and heat is applied to melt and fuse the powders into respective coatings bonded
30 together on the substrate.

The powders may have different rates of cure from one another, and in these circumstances, the higher cure-rate powder may be laid down as a first layer on the
35 substrate, and the lower cure-rate powder may be laid down as a second layer on the first layer. The lower and higher cure-rate materials may be, for example, epoxy,

lower cure-rate being applied to the material of higher cure-rate while this latter material is in the uncured state, prior to curing of both.

BRIEF DESCRIPTION OF THE DRAWINGS

5 Methods of coating and bonding in accordance with the present invention will now be described, by way of example, with reference to the accompanying drawings. in which:

10 Figure 1 is illustrative of a laminate manufactured according to the method of the invention;

Figure 2 is illustrative of a laminate door-panel manufactured according to the method of the invention;
15 and

Figures 3 and 4 are illustrative of the manufacture of further laminate panels, according to the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 Referring to Figure 1, two coats 1 and 2 of thermally-curing powder are applied one upon the other on a substrate 3. The base coat 1 is a low-bake powder (high cure-rate) and is applied to a surface 4 of the substrate 3. While the powder of the coat 1 is still uncured, the
25 second coat 2, which is of a higher-bake cure-window (lower cure-rate), is deposited on it. Heat is then applied to melt both coats 1 and 2, the base coat 1 softening and then hardening first to effect a good bond with the surface 4. The second coat 2 remains wet to
30 ensure good bonding between the cured coat 1 and a backing 5 that is pressed, for example by a nip roller (not shown), onto the coating 2. The applied pressure may press out the melted powder of the coat 2 until curing of the coat 2 is complete, but the first-hardened
35 coat 1 remains substantially unaffected and continuous.

METHOD OF COATING AND METHOD OF BONDING

FIELD OF THE INVENTION

This invention relates to coatings.

BACKGROUND OF THE INVENTION

5 It is known from GB-A-2207089 that powder coatings may be used for bonding two surfaces together by exploiting the melt phase to wet out the surfaces prior to effecting full cure to establish the bond. In normal circumstances, especially when the bond is required
10 between sheets or other large-area surfaces, it is found necessary to employ nip rolling or other pressure-applying means (mechanical or vacuum) to enable a good laminate to be produced. Application of pressure, however, tends to press out the melted powder, and this
15 can be of significant disadvantage where the powder is to provide a coloured or opaque coating to a glass or other transparent or translucent substrate. The applied pressure may result in thinning or pressing out of the melt such that on curing there is no solidity and
20 uniformity of coating-colour or -opacity and the backing to the coating shows through. It is one of the objects of the present invention to provide a method of bonding by which such problems can be avoided.

SUMMARY OF THE INVENTION

25 According to one aspect of the present invention there is provided a method of coating wherein different thermosetting materials are laid down in powder form one upon the other on a substrate, and heat is applied to melt and fuse the powders into respective coatings bonded
30 together on the substrate.

The powders may have different rates of cure from one another, and in these circumstances, the higher cure-rate powder may be laid down as a first layer on the
35 substrate, and the lower cure-rate powder may be laid down as a second layer on the first layer. The lower and higher cure-rate materials may be, for example, epoxy,

lower cure-rate being applied to the material of higher cure-rate while this latter material is in the uncured state, prior to curing of both.

BRIEF DESCRIPTION OF THE DRAWINGS

5 Methods of coating and bonding in accordance with the present invention will now be described, by way of example, with reference to the accompanying drawings. in which:

10 Figure 1 is illustrative of a laminate manufactured according to the method of the invention;

Figure 2 is illustrative of a laminate door-panel manufactured according to the method of the invention;
15 and

Figures 3 and 4 are illustrative of the manufacture of further laminate panels, according to the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 Referring to Figure 1, two coats 1 and 2 of thermally-curing powder are applied one upon the other on a substrate 3. The base coat 1 is a low-bake powder (high cure-rate) and is applied to a surface 4 of the substrate 3. While the powder of the coat 1 is still uncured, the
25 second coat 2, which is of a higher-bake cure-window (lower cure-rate), is deposited on it. Heat is then applied to melt both coats 1 and 2, the base coat 1 softening and then hardening first to effect a good bond with the surface 4. The second coat 2 remains wet to
30 ensure good bonding between the cured coat 1 and a backing 5 that is pressed, for example by a nip roller (not shown), onto the coating 2. The applied pressure may press out the melted powder of the coat 2 until curing of the coat 2 is complete, but the first-hardened
35 coat 1 remains substantially unaffected and continuous.

2/P.R.T.S

WO 00/20347

METHOD OF COATING AND METHOD OF BONDING

This invention relates to coatings.

5 It is known from GB-A-2207089 that powder coatings may be
used for bonding two surfaces together by exploiting the
melt phase to wet out the surfaces prior to effecting
full cure to establish the bond. In normal
circumstances, especially when the bond is required
10 between sheets or other large-area surfaces, it is found
necessary to employ nip rolling or other pressure-
applying means (mechanical or vacuum) to enable a good
laminate to be produced. Application of pressure,
however, tends to press out the melted powder, and this
15 can be of significant disadvantage where the powder is to
provide a coloured or opaque coating to a glass or other
transparent or translucent substrate. The applied
pressure may result in thinning or pressing out of the
melt such that on curing there is no solidity and
20 uniformity of coating-colour or -opacity and the backing
to the coating shows through. It is one of the objects
of the present invention to provide a method of bonding
by which such problems can be avoided.

25 According to one aspect of the present invention there is
provided a method of coating wherein different
thermosetting materials are laid down in powder form one
upon the other on a substrate, and heat is applied to
melt and fuse the powders into respective coatings bonded
30 together on the substrate.

The powders may have different rates of cure from one
another, and in these circumstances, the higher cure-rate
powder may be laid down as a first layer on the
35 substrate, and the lower cure-rate powder may be laid
down as a second layer on the first layer. The lower and
higher cure-rate materials may be, for example, epoxy,

polyester, or acrylic materials. Powder coatings can be produced with a variety of cure-rate windows so as to give markedly different rates of cure. The powders are commonly characterised in this regard as 'high-bake' (5 ('low cure-rate') or 'low-bake' ('high cure-rate')); the terms 'high-bake' and 'low cure-rate' distinguish from the terms 'low-bake' and 'high cure-rate' in that a 'high-bake' or 'low cure-rate' material takes longer to cure at any given temperature than a 'low-bake' or 'high (10 cure-rate' material.

With the method of the invention it is readily possible to obtain a good laminate without the disadvantage of thinning or pressing out of the melt, and in particular (15 to avoid show-through where colour or opacity is required with a transparent or translucent substrate. In the latter respect, and using materials of different cure-rates, the higher cure-rate material may provide a coating with colour or opacity on a transparent or (20 translucent substrate and the lower cure-rate material may be applied to it while the higher cure-rate material is in its initial un-cured state or at least still not fully cured. When this latter material hardens to form a solid and uniform coating, the lower cure-rate material (25 is still in a state to wet the higher cure-rate coating and the backing surface that is pressed onto it, until curing is complete. Even if the pressure applied to the backing to complete the laminate during curing of the lower cure-rate material, presses out that material to be (30 very thin, the already-cured solid-colour or opaque coating visible through the substrate, remains unaffected.

According to another aspect of the present invention (35 there is provided a method of bonding two surfaces together wherein the bond is effected using two bonding materials that have different cure-rates, the material of

lower cure-rate being applied to the material of higher cure-rate while this latter material is in the uncured state, prior to curing of both.

5 Methods of coating and bonding in accordance with the present invention will now be described, by way of example, with reference to the accompanying drawings. in which:

10 Figure 1 is illustrative of a laminate manufactured according to the method of the invention;

15 Figure 2 is illustrative of a laminate door-panel manufactured according to the method of the invention; and

Figures 3 and 4 are illustrative of the manufacture of further laminate panels, according to the invention.

20 Referring to Figure 1, two coats 1 and 2 of thermally-curing powder are applied one upon the other on a substrate 3. The base coat 1 is a low-bake powder (high cure-rate) and is applied to a surface 4 of the substrate 3. While the powder of the coat 1 is still uncured, the
25 second coat 2, which is of a higher-bake cure-window (lower cure-rate), is deposited on it. Heat is then applied to melt both coats 1 and 2, the base coat 1 softening and then hardening first to effect a good bond with the surface 4. The second coat 2 remains wet to
30 ensure good bonding between the cured coat 1 and a backing 5 that is pressed, for example by a nip roller (not shown), onto the coating 2. The applied pressure may press out the melted powder of the coat 2 until curing of the coat 2 is complete, but the first-hardened
35 coat 1 remains substantially unaffected and continuous.

Heat is not applied to melt or cure the low- and high-bake powders until both coats 1 and 2 have been laid down in powder form one upon the other. However, it is preferable to warm the substrate 3 so as to keep the surface 4 free from condensation, but this is not generally intended to affect the condition of the powder deposited on it to any significant extent. The fact that one layer of powder is deposited on the other before heat is applied for melting to take place, is believed to improve the bond between the two coats 1 and 2 because of inevitable intermingling of the powders to some degree, at the interface of the two layers.

Thermosetting powders having different cure-rates may be used according to the invention for the straightforward bonding of one item to another, for example as illustrated in Figure 2.

Referring to Figure 2, two 'paint' coats 11 and 12 (corresponding to coats 1 and 2 respectively) which are applied to a door panel 13 to protect and give colour to its surface 14, also serve to bond an article such as, in this instance, a door handle 15, to the panel 13. The panel is manufactured by first depositing on the surface 14 (electrostatically or by gravity feed) a layer of low-bake powder for the coat 11, and then a layer of high-bake powder on the first powder layer, for the coat 12. Heat is then applied to melt both powder layers and cure the first layer into the coat 11. While the second powder layer is still in the melt phase after the first layer has cured into (or is in an advanced stage towards) the hardened coat 11, the base 16 of the door handle 15 is pressed hard onto the melt and held there until the second layer has cured into the hardened coat 12.

The second powder layer acts to wet out the bond between the coat 11 and the base 16 and ensure a firm bond. It

may provide a clear, protective covering to the coat 11 which will normally be coloured, and may have afford a gloss or satin finish to the door panel 13.

- 5 Resistance to runs and surface imperfections of coatings may be avoided using the method of the invention. The application of first surface colouring, 'painting' is assisted in this process by the ability to apply different colours or thicker coatings in a one-oven line.
- 10 Conventionally each coat is cured before the application of a second coat, whereas with the technique of the present invention two or more coats of differing or similar colour and/or clear (possibly gloss) coat may be applied before any curing takes place. The coats are
- 15 applied as successive powder layers from, for example, separate guns, without any steps being taken to cure one layer before application of the other; once the layers of powder have been deposited, heat is applied to cure them all together in the one step. Each successive powder
- 20 layer laid down has a slower cure-rate than the one preceding it and this ensures that during the resultant progressive cure, a finish without runs or orange peel effect is achieved. If the final coat is clear gloss, a particularly high quality finish is obtained.
- 25
- The invention may be readily applied to the formation of solid, coloured or clear laminates. In particular, a base material may be coated by the adhesion of another similar or differing flexible material. For example, a
- 30 laminate may be brought together by tightly winding a foil or plastics element upon a pipe or tube, or if a planar sheet is involved by using a nip roller or press during the cure phase. Low-bake powder is applied to the base component and then re-coated with a higher-bake
- 35 powder before curing is commenced. When the cure is for example, about 70% complete, the low-bake powder is hard,

but the high-bake is still soft to allow foil(s) or plastics element(s) to be applied with good adhesion.

Where powder coatings are deposited on glass or metal substrates it is usually necessary to promote the bond with the glass or metal surface by use of an adhesion promoter such as a silane. Rather than depositing a silane film on the substrate as is conventional, it is possible however, to include the silane in the coating powder. More particularly, the silane can be involved in the initial mix used for manufacture of the powder, and it has been found advantageous to include acid as well where glass is involved. In the latter respect, the acid is included with the object of providing appropriate pH-modification of the glass surface, to enable optimum action of the silane.

Two powder-coated panels formed using coating powders that include a silane and an acid as referred to above from manufacture, will now be described with reference to Figures 3 and 4.

Referring to Figure 3, a thermosetting epoxy-based powder is in this case deposited electrostatically as a layer 21 on a surface 22 of a substrate 23 of toughened glass. The powder includes, from manufacture, silane and acid components as referred to above, as well as pigmentation. Heat to melt and cure the powder of layer 21 is applied only after a layer 24 of polyethylene powder has been deposited electrostatically on the layer 21.

The applied heat causes both powder layers 21 and 24 to melt. The acid in the melted layer 21 is activated to modify the pH at the surface 22 and initiate the action of the silane to provide the conditions for good adhesion with the surface 22. The melting of the polyethylene layer 24 on the other hand cause a degree of intermixing

with the melted epoxy layer 21 at their interface, so that on hardening of the layer 24 and curing of the layer 21 there is cohesion between them in a good physical bond.

5

Referring to Figure 4, the panel in this case involves a substrate 31 of annealed glass and a transparent polyester-based powder deposited electrostatically as a layer 32 on a surface 33 of the substrate 31. The powder of layer 32 includes, from manufacture, silane and acid components as referred to above, and a layer 34 of another polyester powder not including such components, is deposited electrostatically on the layer 32. The powder of layer 34 includes pigmentation.

10

Heat is applied to melt and cure the powders of both layers 32 and 34. During the melt phase of the powder of layer 32, its acid component is activated to modify the pH at the surface 33 and initiate the action of the silane to provide the conditions for good adhesion with that surface. Furthermore, there is cross-linking at the interface between the two layers 32 and 34 so that when the powders cure there is a strong chemical bond between the resultant coatings and between them and the substrate 31.

15

It is desirable that the layer 32 cures faster than the layer 34 so that while it is gelling a nip roller can be used to press down and smooth out the layer 34 for even cover of the coating of layer 32. Furthermore, a water-protective foil 35 is laid down in contact with the layer 34 while still in the melt phase so as to be bonded firmly to it on cure of this layer.

20

A laminate comprising two layers of glass or plastics bonded together to show the same or similar colours viewed from either side, can be manufactured by the

25

30

35

application of a fast-curing powder containing
pigmentation to one glass or plastics layer and a slow-
curing powder either on top of that or to the other glass
or plastics layer; the slow-cure powder provides a clear
5 coat. Both components are then heated to where the low-
bake powder becomes substantially hard but the high-bake
coat is still wet, the two components being nip rolled or
pressed together as curing of both coats is completed and
the resultant laminate formed.

10

If different colours are to show from the two sides of
the laminate, low-bake powder containing a respective
pigment is deposited on each glass or plastics component,
and high-bake powder on top of one (or possibly both) of
15 the low-bake layers. During curing, the low-bake primary
coats on both components cure to hard but are not fully
cross-linked (for example about 70% cured) while the
high-bake powder is still soft. In this condition the
two components are nipped together and then fully cured;
20 the applied pressure enables gas to be pressed from the
laminate. The cohering high-bake powder is preferably,
though not necessarily, such as to provide a clear coat.

25

Although the substrate and other components used in the
methods as described above are generally non-porous, the
invention is applicable where the components are of a
porous nature. In this respect, a primary coat of low-
bake powder may be applied to a porous (or other)
substrate and after over-coating with a high-bake powder,
30 cured to about 70%. A second component is coated with a
high-bake powder and while this coating and the high-bake
coating of the first component remain soft, the two
components are pressed together for completion of the
curing process. The advantage of this method is that the
35 press stage is undertaken when the primary film is
continuous and substantially hard so as to ensure that

there is no bleed through the porous material from the adhesive layer, during the pressing phase.

5 The use of powders with differing cure-rates optimises cross polymerisation of the two coatings; the dual-cure process enables processing to take place in a perfect gas-free and clean environment right through to full cure.

10 The two coatings may also be two coats of catalyst or ultra-violet curing adhesives with different cure windows. When catalyst adhesives (for example those sold under the trade marks ARALDITE and ARALDITE RAPID) or resins are used, the two cure-rates may be accommodated
15 chemically, allowing for more control of the adhesive layer than hitherto. Conventionally, one-coat application of an adhesive is usually advised. The two components have to be brought together at an early cure time to ensure that the adhesives wet out both surfaces,
20 and then held to full cure, often leading to the bond line being pressed out.

With the method of the present invention, a coat of adhesive is applied to both components, one a fast-cure
25 adhesive and the other a slower-cure adhesive that is formulated to be hard, but not fully cross-linked, when the one is still soft. The faster-cure adhesive delivers a substantially viscose coating that resists the pressure used to bring the surfaces together by nip roller, or
30 press or clamp. The slower-cure adhesive wets out the second surface and offers an optimum bond.

In a process known as the 'Unilam' process, a resin adhesive (such as acrylic, catalyst activated resin) is
35 used for bonding two sheets of glass together. The two glass sheets are held upright spaced apart from one another by a gasket while the resin is poured into the

space between them. Although the resulting bond is generally acceptable, the hydraulic pressure of the resin tends to bow the sheets apart in the middle, unsatisfactorily. The resulting product has a restricted commercial use because of the variation in gauge caused by the bowing and the influence this has on the density, and therefore perceived colour, when viewing the laminate.

With the present invention, however, these limitations can be eliminated to a substantial extent. In this respect, for example, two plastics or glass sheets used to form the laminate are first coated with resin while laid horizontally. A fast-cure resin is applied to a first of the sheets to form a distancing medium, whilst a slow-cure resin is used to wet out the surface of the second sheet to ensure a good bond with the coating of the first sheet when the two sheets are brought together under a nip roller or press. The resultant laminate is unaffected by the inconsistency-of-gauge problems that currently limit the 'Unilam' products.

As an alternative method according to the invention, primary coats of fast-cure resin are poured onto the surfaces of both glass or plastics sheets while the sheets are retained horizontal on a tilt table. The resin flows out flat on each sheet and begins to cure. As the primary coats begin to harden just beyond the gel stage, the table is tilted to vertical and the two sheets are brought together with the required spacing for the laminate, using an edge gasket. A third layer of resin is then introduced by pouring into the gap between the hardening coats on the two sheets; the sheets are held vertical to degas the resin while pouring takes place. Once the catalysts have substantially cured the primary coats and the poured-resin layer is gelling, the two sheets are returned to the horizontal and the laminate

passed through nip rollers squeezing out the poured-layer to give a consistent gauge.

- 5 Methods in accordance with the invention, using the differential cure-rate technique, may be applied to the manufacture of solar and other panels where an interlayer is to be inserted, for example, to provide a continuous electrically insulating, conducting or other interface between successive layers of the laminate. By
- 10 sandwiching aluminium, copper, silicon chips, silicon crystals or other items between low-bake layers, these can then be bonded to outer, substrate layers to make up the laminate, using high-bake material to effect the bond. Similarly, photographic or other images may be
- 15 inserted into the laminate as a means of decoration, publicity or other purposes.

Claims:

1. A method of coating wherein different thermosetting materials are laid down in powder form one upon the other on a substrate, and heat is applied to melt and fuse the powders into respective coatings bonded together on the substrate.
2. A method according to Claim 1 wherein the powders have different rates of cure from one another.
3. A method according to Claim 2 wherein the higher cure-rate powder is laid down as a first layer on the substrate, and the lower cure-rate powder is laid down as a second layer on the first layer.
4. A method according to Claim 2 or Claim 3 wherein while the second layer is still in the melt phase and the first layer is substantially cured, an item to be bonded to the substrate is brought into contact with the second layer and held there until the second layer cures.
5. A method according to any one of Claims 1 to 4 wherein one or both powders include pigmentation.
6. A method according to any one of Claims 1 to 5 wherein one of the powders when fused is transparent.
7. A method of bonding two surfaces together wherein the bond is effected using two bonding materials that have different cure-rates, the material of lower cure-rate being applied to the material of higher cure-rate while this latter material is in the uncured state, prior to curing of both.

8. A method according to Claim 7 wherein the materials are thermosetting materials and are deposited in powder form on respective substrates that are to be bonded together, heat is applied to both powders to melt them and to cure partly the material of higher cure-rate such as to bond it to its substrate, and this partly-cured material is then brought into contact with the melted material of low cure-rate so that upon curing of both materials a bond is established between them.

9. A method according to Claim 8 wherein one or both powders include pigmentation.

Abstract of the Disclosure

Coatings (1,2) on a glass substrate (3) are formed by laying down layers of different thermosetting materials one upon the other in power form on a surface (4). The power of transparent coating (1) has a higher-cure rate than that of color coating (2) so that when heat is applied, coating (2) remains in the melt condition while the coating hardens, to bond with and enable rolling out onto coating (1), as well as bonding with a backing (5). Materials of different cure-rates are also used for bonding substrates together by brining the two materials together while on is partly-cured and the other is the melt condition.

[illegible]

1/2

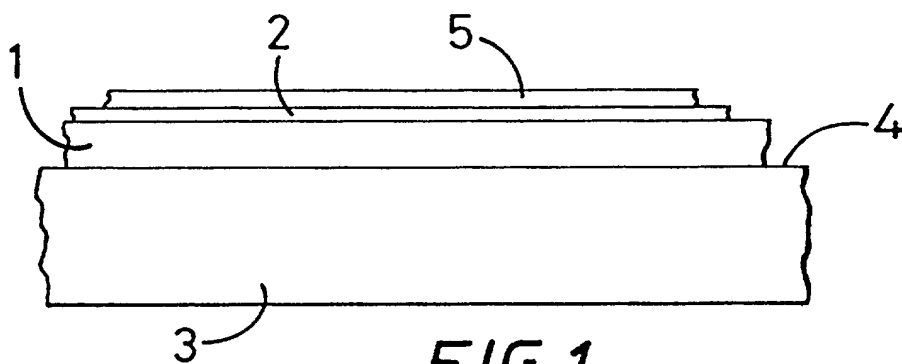


FIG. 1

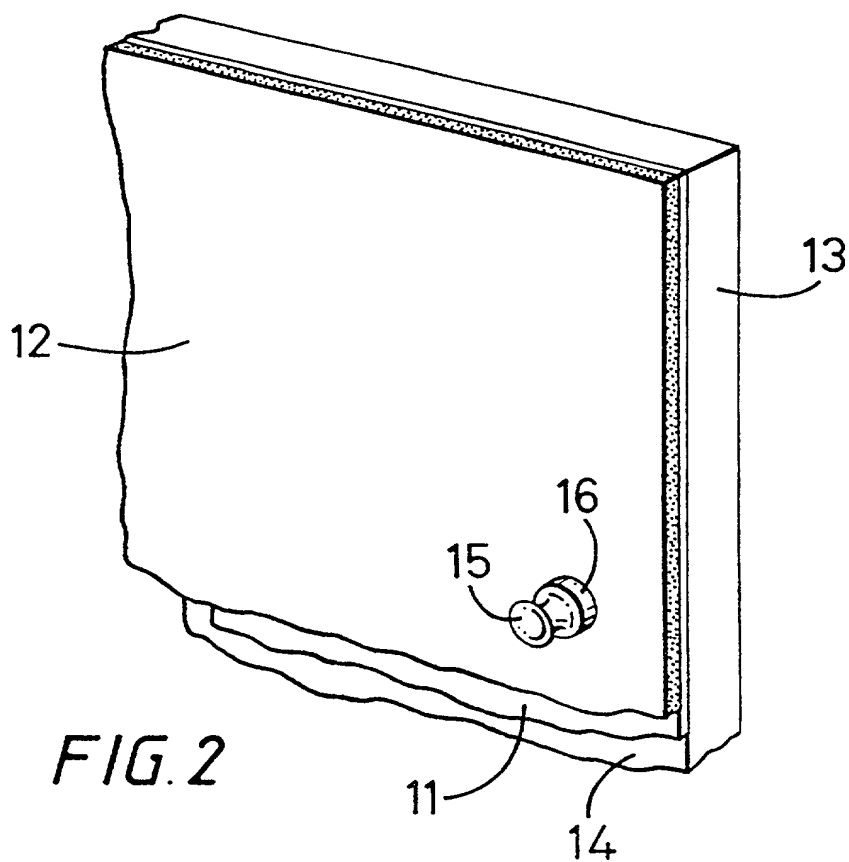


FIG. 2

2/2

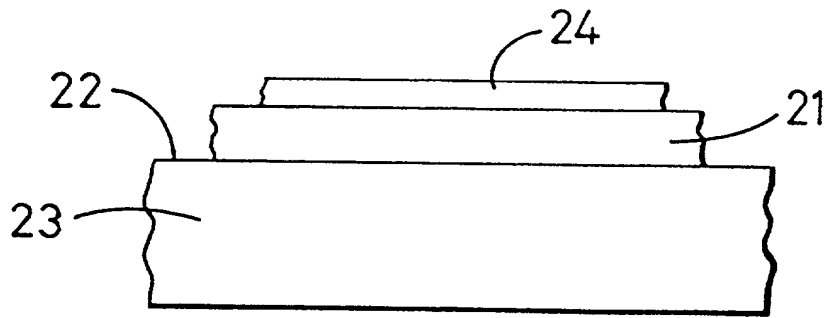


FIG. 3

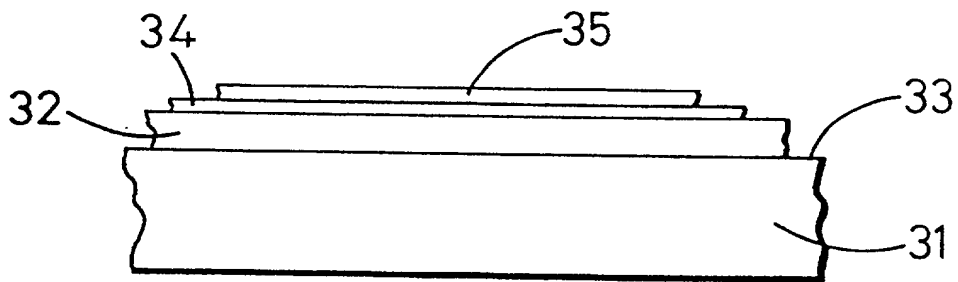


FIG. 4

COMBINED DECLARATION AND POWER OF ATTORNEY
(Original, Design, National Stage of PCT, Supplemental)

As a below named inventor, I hereby declare that:

TYPE OF DECLARATION

This declaration is of the following type: (check one applicable item below)

- ☐ original
- ☐ design
- ☐ supplemental
- ☒ **National Stage of PCT**
- ☐ divisional (see added page)
- ☐ continuation (see added page)
- ☐ continuation-in-part (see added page)

INVENTORSHIP IDENTIFICATION

My/our residence, post office address and citizenship is/are as stated below next to my/our name. I/We believe that the named inventor or inventors listed below is/are the original and first inventor or inventors of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TITLE OF INVENTION

METHOD OF COATING AND METHOD OF BONDING

SPECIFICATION IDENTIFICATION

The specification of which: (complete (a), (b) or (c))

- (a) ☒ is attached hereto.
- (b) ☐ was filed on _____ with an effective filing date of October 8, 1999
_____ as
☐ Serial No. _____ or
☐ Express Mail No. _____ as Serial No. (not yet known) and
was amended on _____ (if applicable).
- (c) ☒ was described and claimed in PCT International Application No. _____
PCT/GB99/03333 filed on _____ October 8, 1999 and as amended
under PCT Article 19 on _____ (if any).
- (d) ☐ amended on _____

POWER OF ATTORNEY

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name(s) and registration number(s))

3 Anthony G. M. Davis Registration No. 27,868
Michael J. Bujold Registration No. 32,018
Scott A. Daniels Registration No. 42,462

- ☐ Attached as part of this Declaration and Power of Attorney is the authorization of the above-named attorney(s) to accept and follow instructions from my representative(s).

Send Correspondence to:

Direct Telephone Calls to:
(603) 624-9220

Davis & Bujold, P. L. L. C.
Fourth Floor
500 N. Commercial Street
Manchester, NH 03101-1151

Direct Telefaxes to:
(603) 624-9229

CHROMATICS TS

☎ +01483281166

04/04 '01 11:13 :02/10

05/04/2001 11:07 +44-1494-678267

GRAHAM COLES & CO

PAGE 03

5

ACKNOWLEDGMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I/We hereby state that I/We have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I/We acknowledge the duty to disclose to the United States Patent Office all information which is known to be material to patentability of this application as defined in § 1.56 of Title 37 of the Code of Federal Regulations.

PRIORITY CLAIM

I/We hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT International application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT International application(s) designating at least one country other than the United States of America filed by me/us on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

**EARLIEST FOREIGN APPLICATION(S), IF ANY FILED WITHIN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION**

COUNTRY	APPLICATION NO.	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 37 USC 119
Great Britain	9821891.6	October 8, 1998	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO

**ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION**

☐ I/We hereby claim the benefit, under 35 U.S.C. 119(e), of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

DECLARATION

I/We hereby declare that all statements made herein of my/our own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole inventor: Robert John LEACH

Inventor's signature: [Signature]

Date: 05 04 2001

Residence: Purbank House, Robin Road, West Hoxley, Leatherhead, Surrey KT24 6LN, ENGLAND ENG

Post Office Address: Same as above Country of Citizenship: Great Britain